

SE TR - Transportable Approved Dispensing Diesel Tank




Storage and distribution of dangerous and class II and III flammable liquids (automotive fuels), containers certified by Bureau Veritas according to IMDG 32° and D.P.R. June 6th 2005, suitable for the transport of inflammable liquids (diesel), in compliance with ADR/RID/IMDG in Europe, without ADR licenses or transport. Can be installed on pick-ups or vans, recommended for the re-fueling of operational machinery in work sites, yards, etc.

- Obligatory test-revision every 30 months (from the date of certification)

Standard Equipment:

- Shockproof structure and palletizable anti-roll
- Hatch on top
- Double effect release valve
- Approved charge cap with lockable rapid closing
- 12 V dispensing group with a delivery equal to 50 Lt/min with 5 mt. Hose and automatic nozzle
- Total liter counter and resettable partial
- Comparison table (cm/Lt)
- Test certificate by Bureau Veritas
- Maintenance and User's manual

Tank	Material:	St 235 Jr
	Internal protective processing:	Rough
	External protective processing:	Painting with anti rust and industrial glaze
	Operation (P max. / T max.):	Atmospheric pressure / 25°C
	Warranty:	2 year (construction defects) 1 year (parts and electrical components)

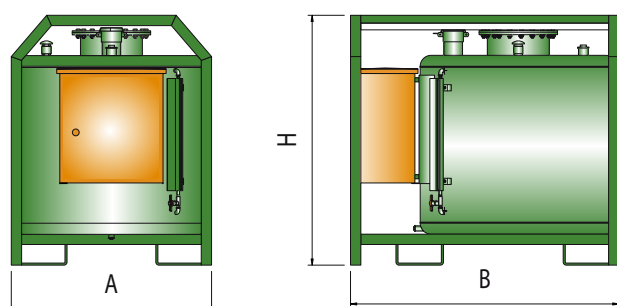

Capacity (Lt)	Dimensions (mm)			Weight (kg)
	A	B	H	
300	770	1150	1010	148
400	770	1150	1260	162
600	970	1300	1210	237
1000	1035	1810	1325	313

SE TR - Transportable Approved Dispensing Diesel Tank

Capacity (Lt)	Code	€
300	SE 300 TR	-
400	SE 400 TR	-
600	SE 600 TR	-
1000	SE 1000 TR	-

Surcharge for installation of 12/24 V 50 Lt/min range (request quote)

Surcharge for installation of BIPUMP 12/24 V 85 Lt/min range (request quote)