

SE TR ALL - Transportable Approved fuel (gasoline - diesel) distributor tank

Storage and distribution of fuels for automotive subjects under ADR law. Certified containers by Bureau Veritas according to IMDG 32° and D.P.R. June 6th 2005, suitable for the transport of inflammable liquids (gasoline, kerosene, ethanol, bio-ethanol, diesel, bio-diesel), in compliance with ADR/RID/IMDG in Europe, without ADR licenses or transport.


- Can be installed on pick-ups or vans, recommended for the re-fueling of operational machinery in work sites, yards, boats, motorcycles, competitive vehicles, etc.
- Diesel: NO ADR license (up to 1000 Lt.)
- Gasoline and derivatives: NO ADR license (up to 333 Lt.)
- Obligatory test-revision every 30 months (from the date of certification)

Standard Equipment:

- Upper Ø 320 Hatch
- 1" air intake valve
- 2" charge cap with security lock
- Internal breakwater wall (except for 80 Lt. Model)
- Metal identification tag
- Test certificate by Bureau Veritas
- Approval certificate issued by the Ministry of Transportation and the General Command of the Harbour Masters, other certification as required by law
- Maintenance and User's manual

Distribution groups available:

- Manual rotative pump, explosion-proof, for liquids belonging to Class 3 with inflammable point lower than 23°C (benzene)
- 12/24 volt electrical pump, for liquids belonging to class 3 with inflammable point between 23 and 60°C (diesel)

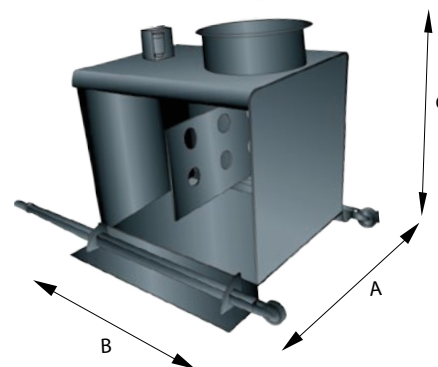

Tank	Material:	Anodized aluminum 5754 h 111 4 mm thick
	Operation (P max. / T max.):	Atmospheric pressure / 25°C
	Warranty:	2 year (construction defects) 1 year (parts and electrical components)

SE TR ALL - Transportable Approved fuel distributor tank				
Capacity (Lt)	Dimensions (mm)			Weight (kg)
	A	B	H	
80	620	500	570	17
250	895	750	770	37
333	895	1000	770	48
490	895	1360	770	63

Capacity (Lt)	Code	€
80	SE 80 CA	-
250	SE 250 CA	-
333	SE 333 CA	-
490	SE 490 CA	-

Gasoline fittings			Diesel fittings		
Art.	Code	€	Art.	Code	€
Manual Pump ATEX	ATEX	-	12V Panther 56 + 4 mt. Cord + clamps	P12G	-
4 mt. Gasoline hose ATEX	TB	-	35 Lt/min Manual Diesel Pump	PMG	-
Automatic gasoline Nozzle ATEX	PAB	-	Ø 3/4" L Rubber Hose =5mt (56 Lt/min)	TG34	-
Gasoline rapid attachment (obligatory)	ARB	-	Manual Gasoline Nozzle	PAM	-
K24 digital liter counter for ATEX gasoline	K24B	-	Automatic Nozzle A60 (P= 56Lt/min)	PA56	-
K33 ATEX Liter Counter	K33 ATEX	-	K24 Diesel Digital Liter Counter	K24G	-